

-moviroll

3

ROLL PUSHERS & ACCESSORIES



moviroll **ROLL PUSHERS & ACCESSORIES**

Moviroll roll pushers improve the productivity and increase the safety level as they allow the operator to effortlessly and safely maneuver both large and small cylindrical loads. Moviroll roll pushers reduce risks for the operator according to the Technical Standards ISO 11228 "Ergonomics Manual handling".

They are ideal to move paper rolls, but they are also used to move loads in several other industrial applications.

A wide range of pneumatically and battery operated models plus a variety of optionals and accessories are available, all of them designed, manufactured and assembled on site at Renova. For this reason we are able to quickly work on customized projects at competitive prices.

Send us your application requirements and we will work with you to find the model that suits your needs.

Click on the "play" icons in this catalog and see demonstration videos!





BATTERY ROLL PUSHERS

Battery roll pushers offer the advantage of free movement without the constraints of the pneumatic connections or electrical cables.



CHARGE INDICATOR LEDs or display depending on the model

4

OVERSIZED WHEELS

to easily overcome any obstacles along the way



FORWARD & REVERSE GEAR two buttons shielded from dirt, dust and water





ON/OFF SWITCH preserves the battery charge





LITHIUM BATTERY

We provide high performance systems with the longest running time respecting the environment and safeguarding the health of the operator.



PLUG & PLAY Quick battery changes in less than 10"



Battery charger provided



DURABLE CHARGE

Up to 50 working hours with one battery charge



RAPID RECHARGE

Maximum 4 hours required for a full recharge



LONG LIFE SPAN

Battery life span about 500 recharges


Battery series



24 V



Applied to the battery and to the device

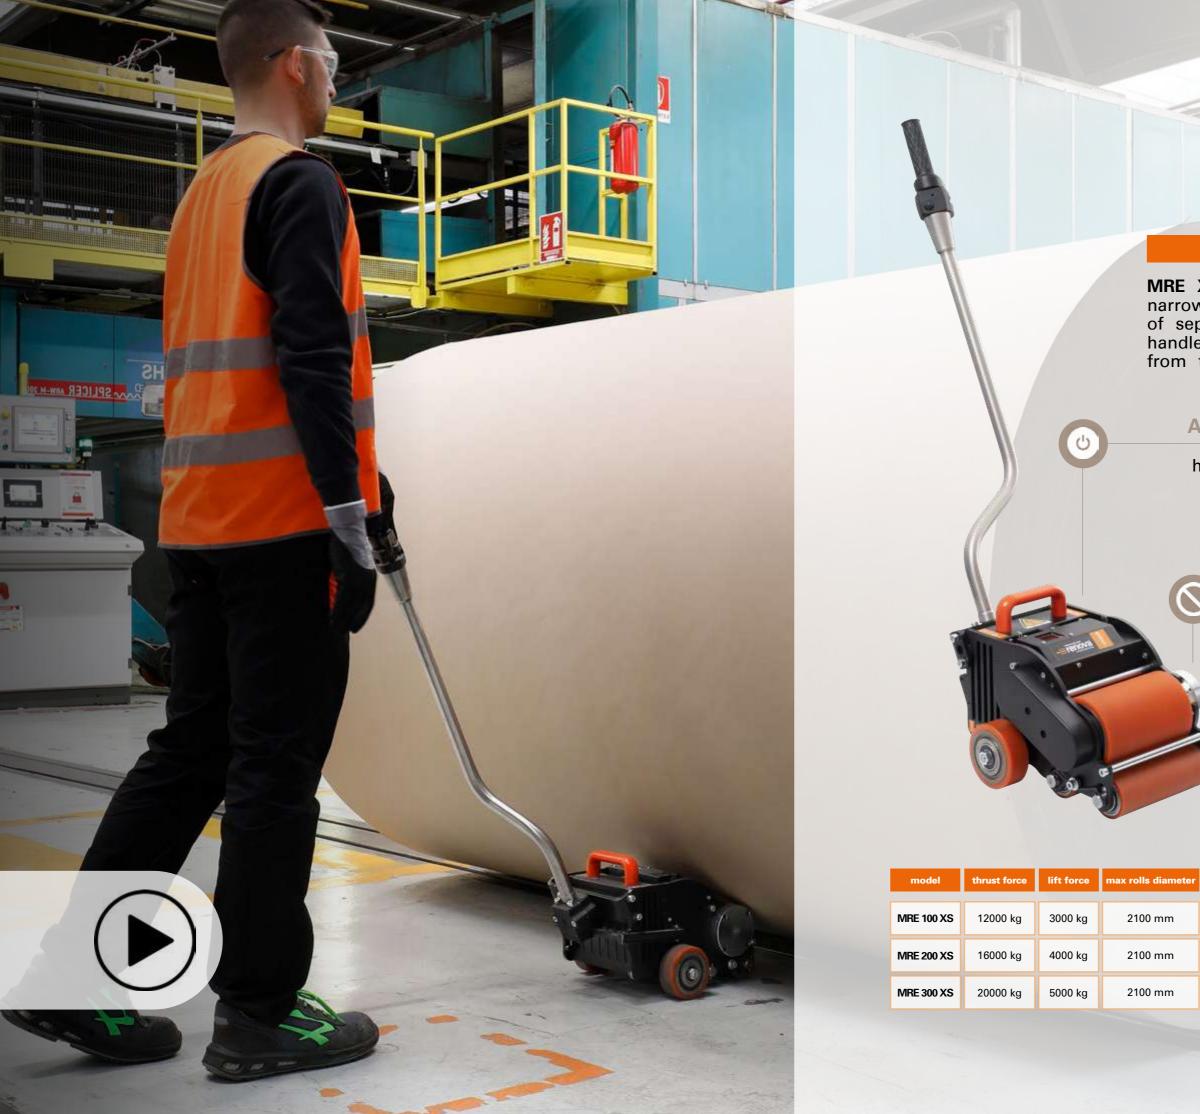

MRE XS

SUPER COMPACT DESIGN

MRE XS is the best solution to fit narrow spaces or when the need of separating two rolls arises. The handle can be mounted at two heights from the ground, 850 or 920 mm.

AUTO SWITCH-OFF DISPLAY


helps saving energy while giving the machine more battery autonomy.

ANTI-ROLLBACK

let go of the accelerator without the risk of the roll moving back due to the weight of the roll especially during the lift phase.

motor	battery	max speed	unit weight	
48 V DC IP 44 brushless	lithium 48 V	13 m/min	30 kg	
48 V DC IP 44 brushless	lithium 48 V	9 m/min	30 kg	
48 V DC IP 44 brushless	lithium 48 V	7 m/min	30 kg	

9

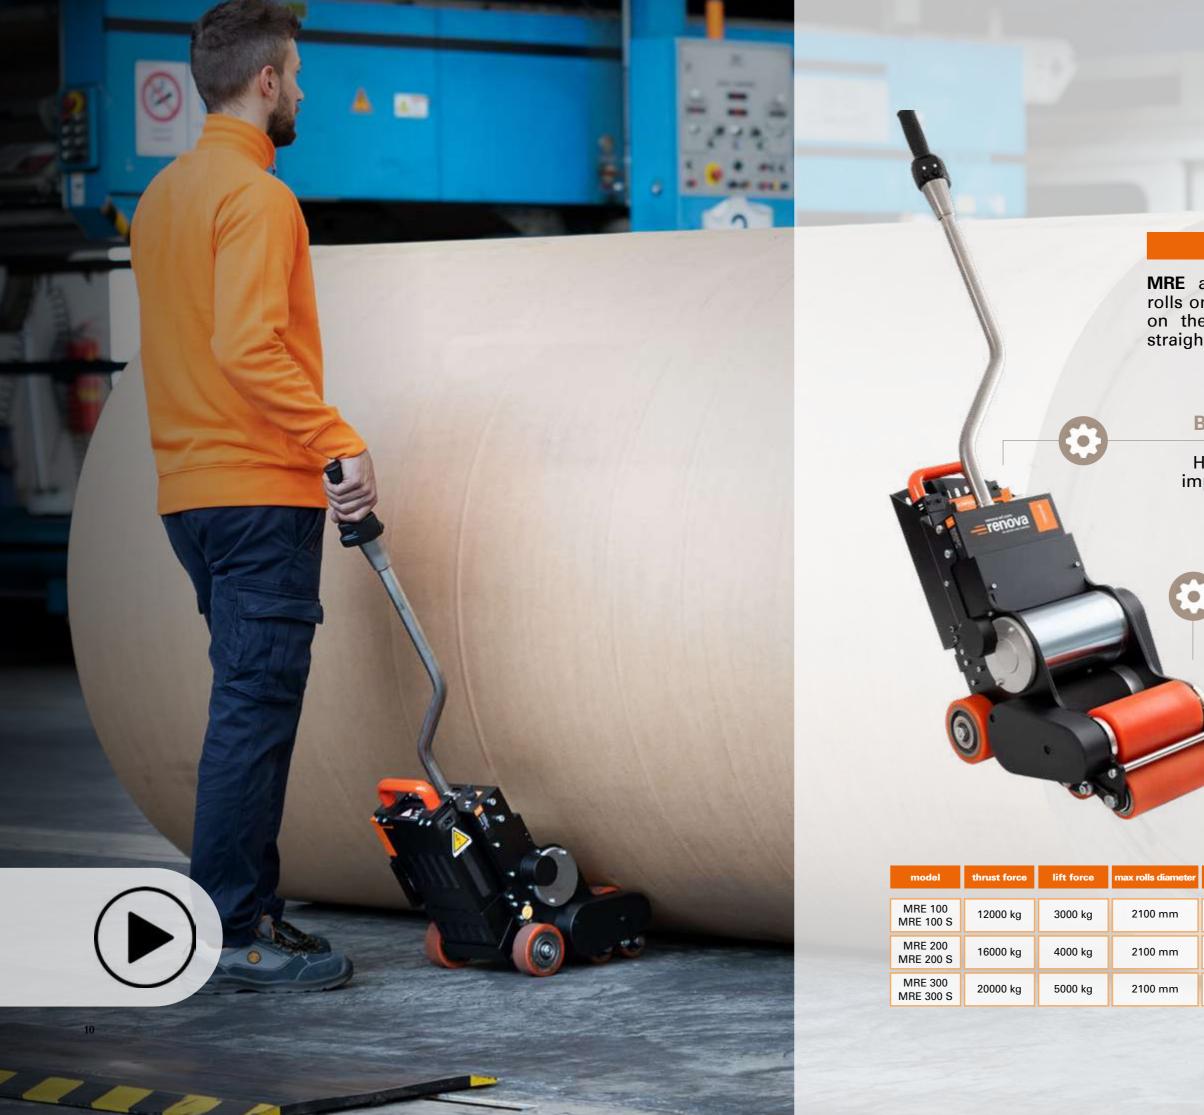

MRE

HEAVY-DUTY DESIGN

MRE allows the operator to move rolls on a flat surface and place them on the shuttle cart. Available with straight handle or curved handle 'S'.

new BATTERY GUIDE OPTIONAL

High battery protection from any impact. It also makes inserting the battery easier*.


PLATE OPTIONAL

designed to push rolls from their side*.



*details at page 21.

motor	tor battery max speed		unit weight
24 V DC IP 44	lithium 24 V	13 m/min	45 kg
24 V DC IP 44	lithium 24 V	10 m/min	45 kg
24 V DC IP 44	lithium 24 V	8 m/min	45 kg

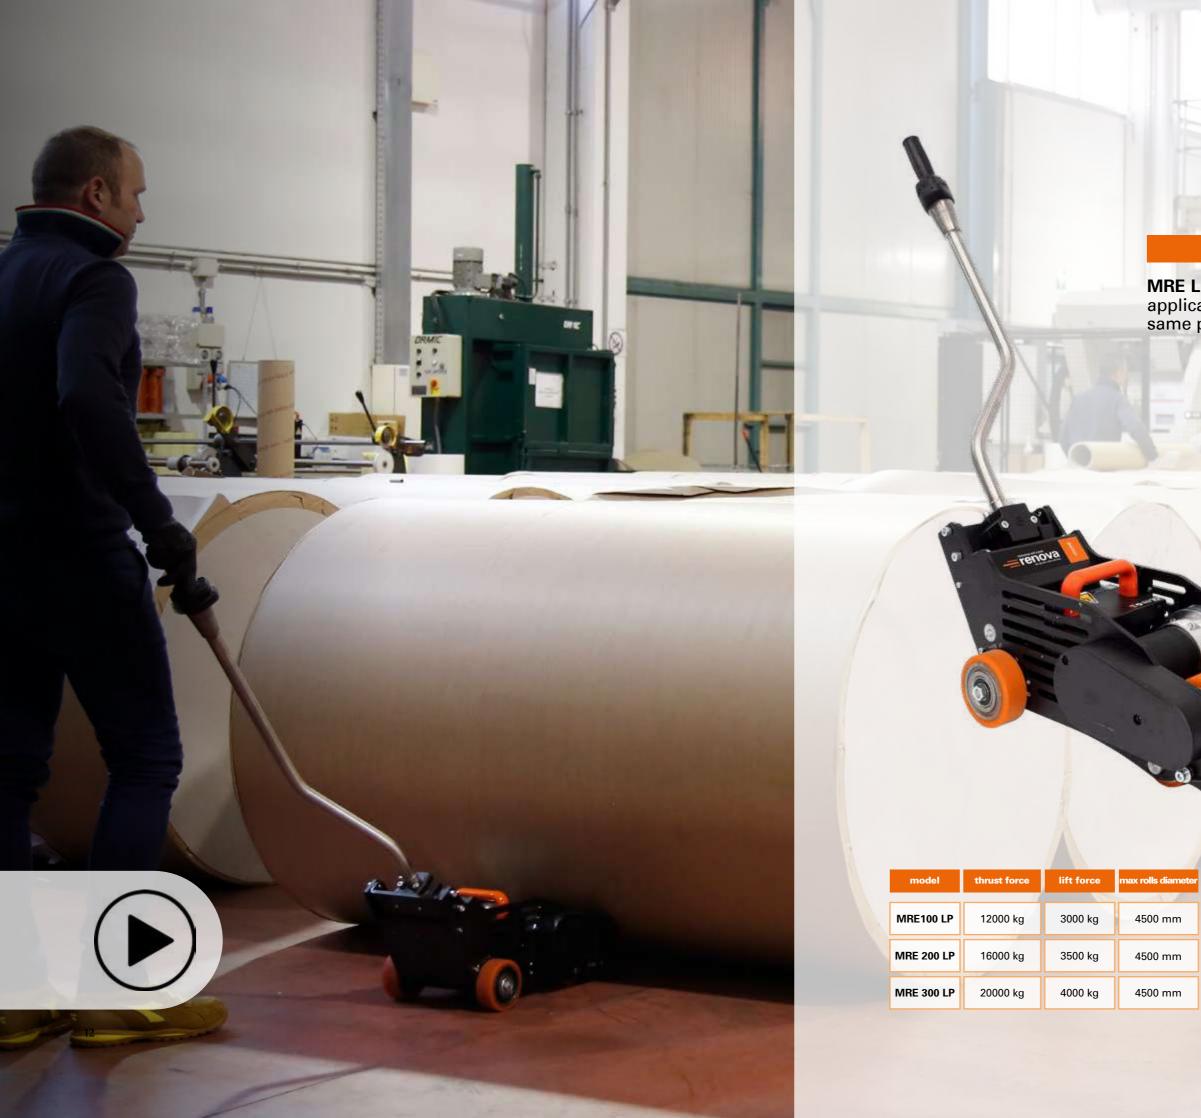

MRE LP

10

HEAVY-DUTY DESIGN

MRE LP has been designed for special applications. It has different design but same performances of MRE model.

motor	battery max speed		unit weight
24 V DC IP 44	lithium 24 V	13 m/min	36 kg
24 V DC IP 44	lithium 24 V	10 m/min	36 kg
24 V DC IP 44	lithium 24 V	8 m/min	36 kg

PNEUMATIC ROLL PUSHERS

Pneumatic models use the power of a high quality pneumatic gear motor powered by pressurized air at 6 bar and are suitable with straight or curved handle "S".

ERGONOMIC HANDLE

all models are available with straight handle or curved handle 'S'

SAFE ACTIVATION OF ROLLERS


0

only when the load is applied

POWERFUL MOTOR

powered by pressurized and lubricated air at 6 bar

STURDY DESIGN compact, handy and heavy duty

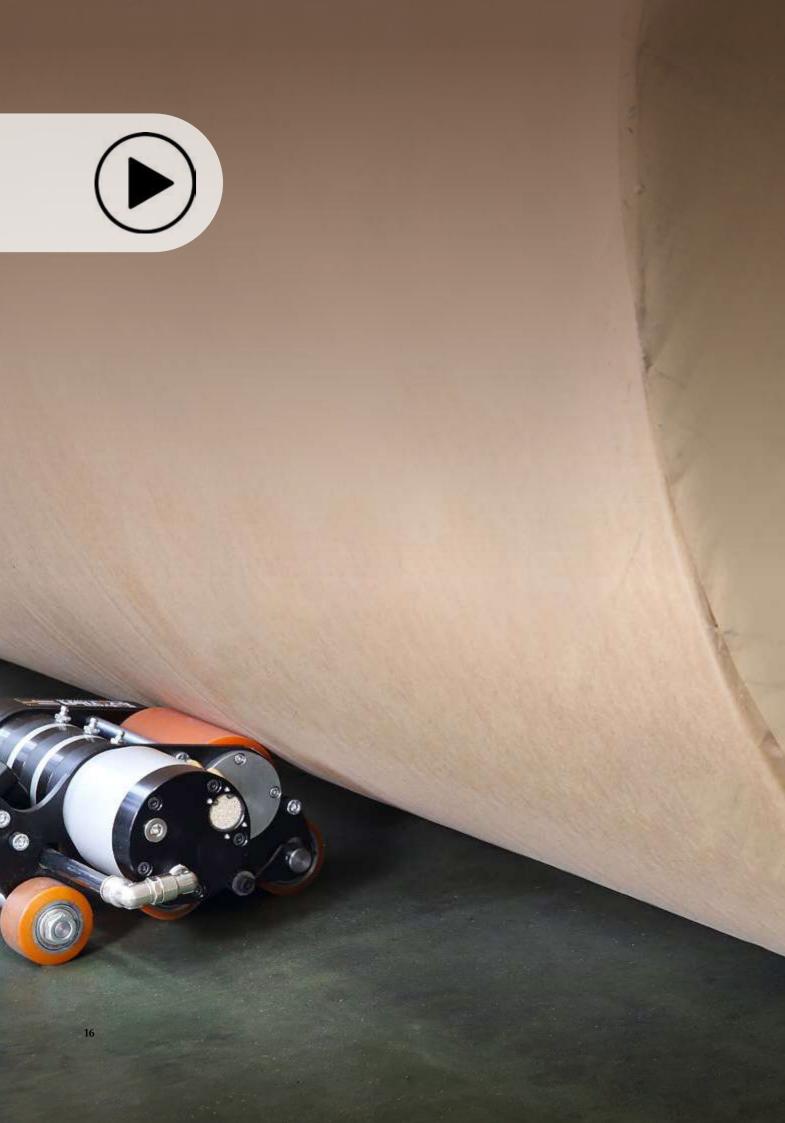

handle 'S'.



curved handle 'S'

model	thrust force	lift force	max rolls diameter	max speed	air pressure	air consumption	unit weight
MR100 MR100 S	10000 kg	2500 kg	2600 mm	24 m/min	6-7 bar	28 l/sec	24 kg
MR200 MR200 S	20000 kg	5000 kg	2600 mm	20 m/min	6-7 bar	40 l/sec	24 kg
MR100 H MR100 SH	10000 kg	2500 kg	2600 mm	20 m/min	6-7 bar	22 l/sec	20 kg
MR200 H MR200 SH	20000 kg	5000 kg	2600 mm	18 m/min	6-7 bar	34 l/sec	21,5 kg

MR **MR H**

STRAIGHT OR CURVED HANDLE

A proper maintenance of the **MR** engine with lubricating oil guarantees its correct conservation and performances over time. The MR H engine doesn't need lubricating oil. This means same performances with inferior consumptions and maintenance costs. Both models are available with straight handle or curved



ANCILLARY EQUIPMENT

18

Moviroll ancillary equipment integrates the functionality of the pneumatic and battery powered roll pushers, as they support the operator in all processes related to the handling of loads.







model	load capacity	rotation
PRT2000	2000 kg	360°
PRT7000	7000 kg	360°



Movidrum is a motorless reel mover that allows to effortlessly and safely push reels on a flat surface.

Movidrum drum mover is a customized product according to the bore diameter, reel diameter, reel weight and reel width.

Max. thrust force 650 kg.

ROTATING PLATE

Safely rotates 360° cylindrical loads without any effort for the operator.

unit weight	unit dimensions
35 kg	400 x 380 mm
46 kg	700 x 680 mm


OPTIONALS

We offer a wide range of accessories to meet the different needs of the industry.

6



A wide range of different handles are available for all battery models.

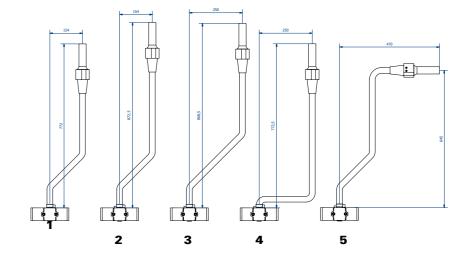





Custom plates are designed to push reels from their side.



CODE: MREK0042

Only for MRE models. Provides battery protection from any impact and makes inserting the battery easier.



-=renova

we are here to support you

Please don't hesitate to contact us for any information or custom projects.

Click the APPLICATION icon and send us your application requirements and we will work with you to find the solution that fits your needs.

RIAL

A line of material handling equipment that allow the operators to smoothly and safely maneuver heavy loads

RODUCT FINDER >




+39 02 27007394



info@renova-srl.com



www.renova-srl.com

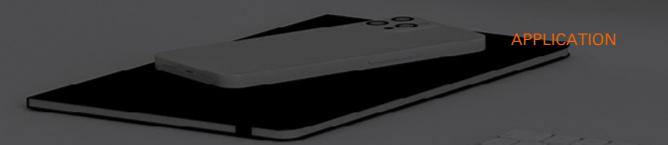







renova srl

viale rimembranze 93 20099 sesto san giovanni milano - Italy

+39 0227007394

- info@renova-srl.com
- www.renova-srl.com