



 **moviroll**

ROLL PUSHERS & ACCESSORIES



# moviroll

## ROLL PUSHERS & ACCESSORIES

Moviroll roll pushers improve the productivity and increase the safety level as they allow the operator to effortlessly and safely maneuver both large and small cylindrical loads. Moviroll roll pushers reduce risks for the operator according to the Technical Standards ISO 11228 "Ergonomics Manual handling".

They are ideal to move paper rolls, but they are also used to move loads in several other industrial applications.

A wide range of pneumatically and battery operated models plus a variety of optionals and accessories are available, all of them designed, manufactured and assembled on site at Renova. For this reason we are able to quickly work on customized projects at competitive prices.

Send us your application requirements and we will work with you to find the model that suits your needs.

Click on the "play" icons in this catalog and see demonstration videos!





# BATTERY ROLL PUSHERS

Battery roll pushers offer the advantage of free movement without the constraints of the pneumatic connections or electrical cables.



## CHARGE INDICATOR

LEDs or display depending on the model

## VARIABLE SPEED

to suit any operator needs

## FORWARD & REVERSE GEAR

two buttons shielded from dirt, dust and water



## ON/OFF SWITCH

preserves the battery charge

## CUT FRAMES

easy removal of roller & bearings

## OVERSIZED WHEELS

to easily overcome any obstacles along the way





# LITHIUM BATTERY

We provide high performance systems with the longest running time respecting the environment and safeguarding the health of the operator.



## PLUG & PLAY

Quick battery changes in less than 10''



## ECO-FRIENDLY

Battery charger provided



## DURABLE CHARGE

Up to 50 working hours with one battery charge



## RAPID RECHARGE

Maximum 4 hours required for a full recharge



## LONG LIFE SPAN

Battery life span about 500 recharges

## Battery series

48 V




24 V



## 2 YEAR WARRANTY

Applied to the battery and to the device



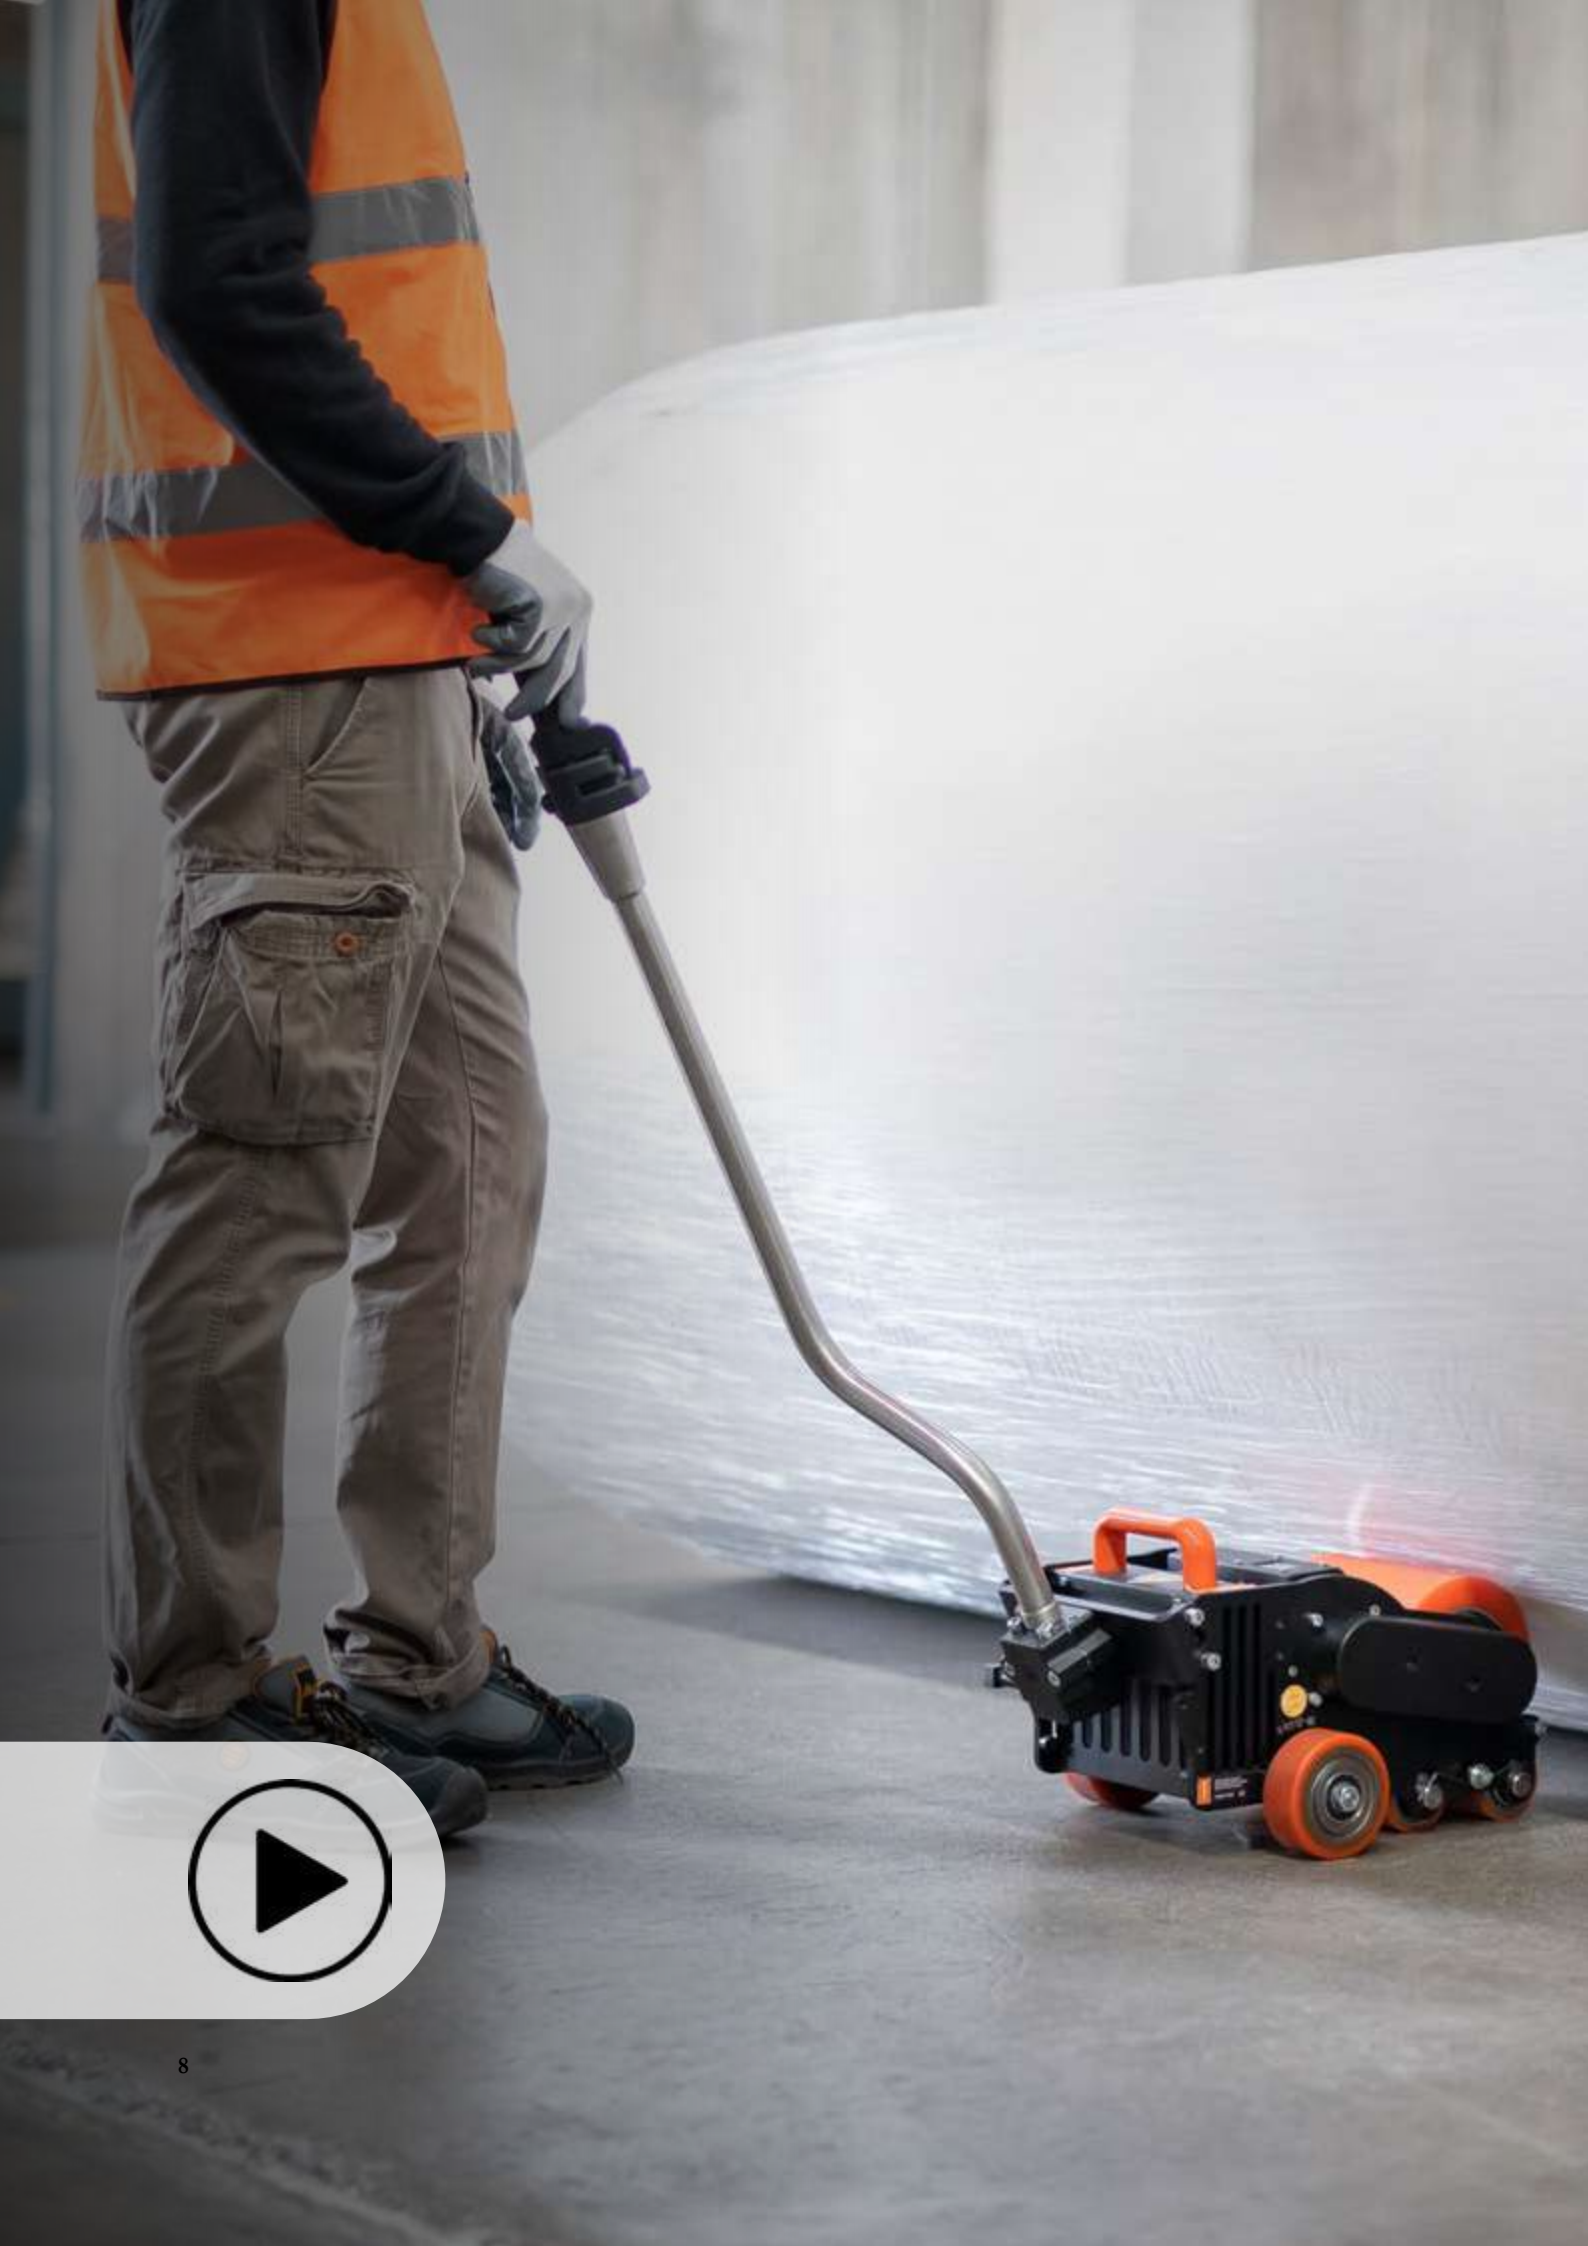

# MRE XS LPT

## SUPER COMPACT DESIGN

MRE XS LPT is the best solution to fit narrow spaces or when the need of separating two rolls arises. The handle can be mounted at two heights from the ground, 850 or 920 mm.

**new**

## AUTO SWITCH-OFF DISPLAY

helps saving energy while giving the machine more battery autonomy.

## OVERSIZED ROLLER

designed to handle soft material rolls preventing roll damages.


**new**

## ANTI-ROLLBACK

let go of the accelerator without the risk of the roll moving back.

model	thrust force	lift force	max rolls diameter	motor	battery	max speed	unit weight
MRE 100 XS	12000 kg	3000 kg	2100 mm	48 V DC IP 44 brushless	lithium 48 V	13 m/min	30 kg
MRE 200 XS	16000 kg	4000 kg	2100 mm	48 V DC IP 44 brushless	lithium 48 V	9 m/min	30 kg
MRE 300 XS	20000 kg	5000 kg	2100 mm	48 V DC IP 44 brushless	lithium 48 V	7 m/min	30 kg



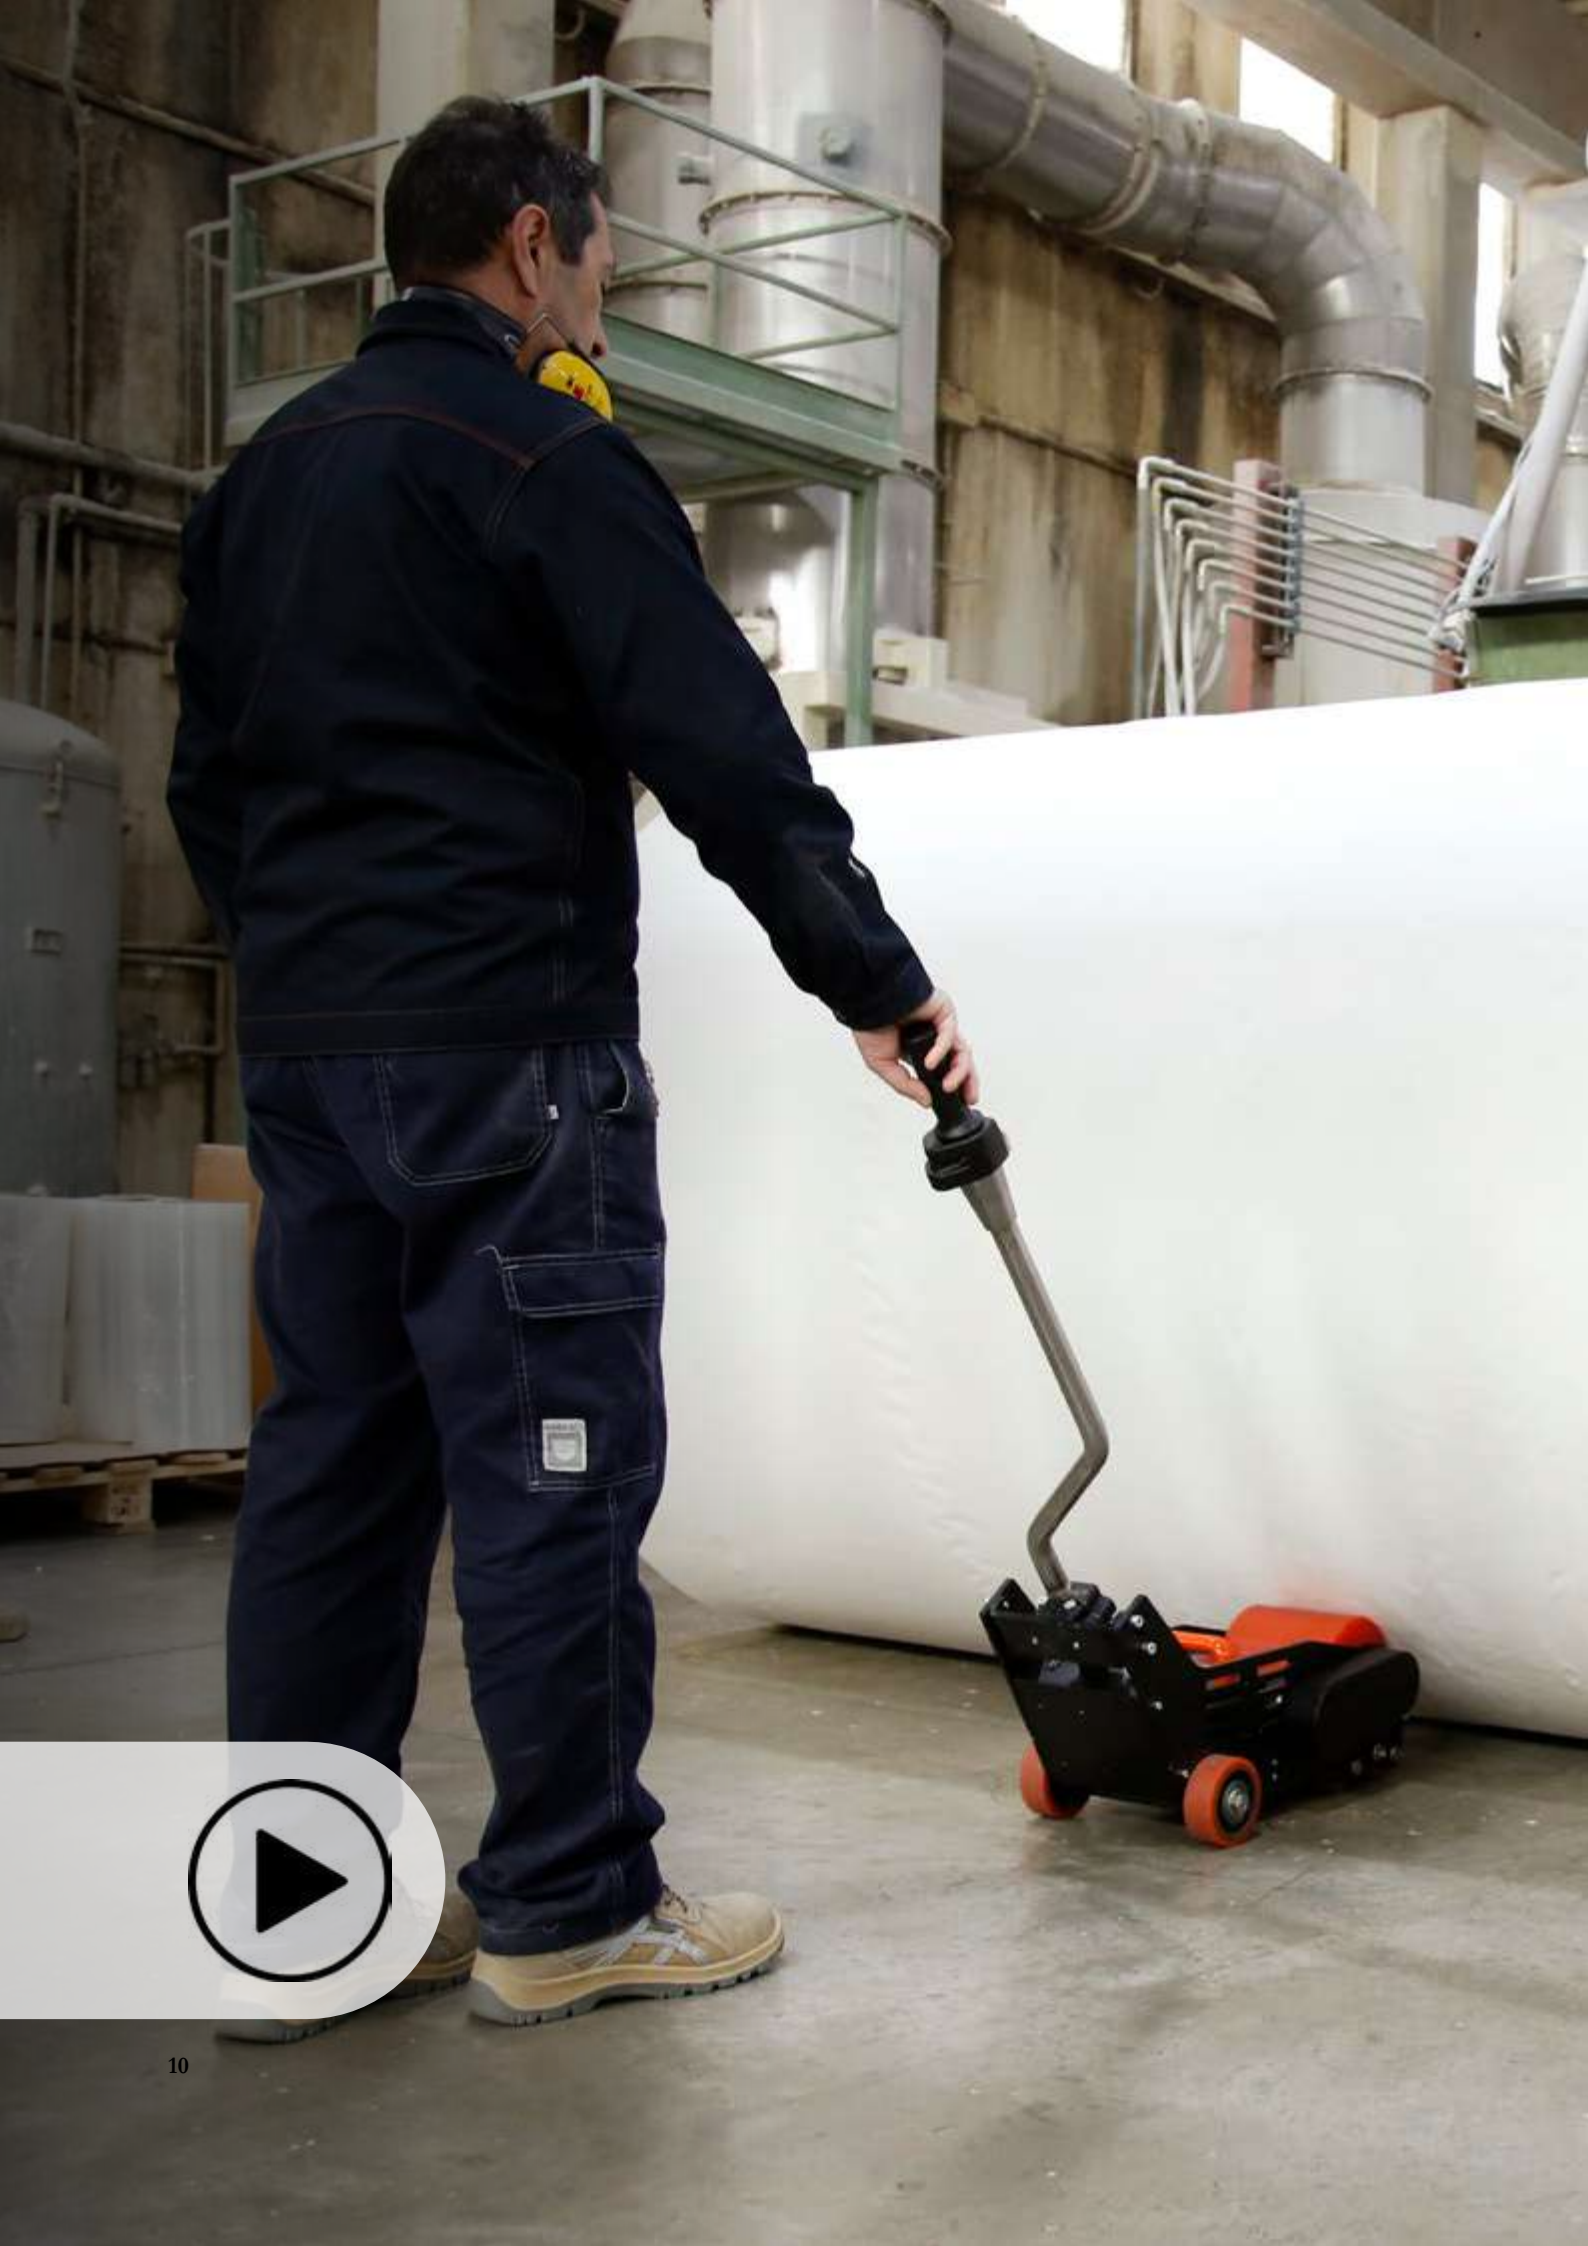

# MRE LPT

## HEAVY-DUTY DESIGN

MRE LPT allows the operator to move on a flat surface soft material rolls, as tissue paper rolls, with or without plastic film.

## OVERSIZED ROLLER

Especially designed to handle soft material rolls preventing roll damages.

model	thrust force	lift force	max rolls diameter	motor	battery	max speed	unit weight
MRE 100 LPT	12000 kg	3000 kg	4500 mm	24 V DC IP 44	lithium 24 V	13 m/min	36 kg
MRE 200 PLT	16000 kg	4000 kg	4500 mm	24 V DC IP 44	lithium 24 V	10 m/min	36 kg
MRE 300 LPT	20000 kg	5000 kg	4500 mm	24 V DC IP 44	lithium 24 V	8 m/min	36 kg





# ANCILLARY EQUIPMENT

Moviroll ancillary equipment integrates the functionality of the pneumatic and battery powered roll pushers, as they support the operator in all processes related to the handling of loads.



## MOVIDRUM

Movidrum is a motorless reel mover that allows to effortlessly and safely push reels on a flat surface.

Movidrum drum mover is a customized product according to the bore diameter, reel diameter, reel weight and reel width.

Max. thrust force 650 kg.



## ROTATING PLATE

Safely rotates 360° cylindrical loads without any effort for the operator.



model	load capacity	rotation	unit weight	unit dimensions
PRT2000	2000 kg	360°	35 kg	400 x 380 mm
PRT7000	7000 kg	360°	46 kg	700 x 680 mm

**we are here to *support* you**

Please don't hesitate to **contact** us for any information or **custom projects**.

**Click** the **APPLICATION icon** and send us your application requirements and we will work with you to find the solution that fits your needs.



+39 02 27007394



[info@renova-srl.com](mailto:info@renova-srl.com)



[www.renova-srl.com](http://www.renova-srl.com)

APPLICATION







**renova srl**

viale rimembranze 93  
20099 sesto san giovanni  
milano - Italy

+39 0227007394  
info@renova-srl.com  
www.renova-srl.com

CAT.MRELPT.EN.V02.0124

